


Data sheet safety information

1. IDENTIFICATION PRODUCT

Cable ties made with Polyamid 6.6 based detectable plastic

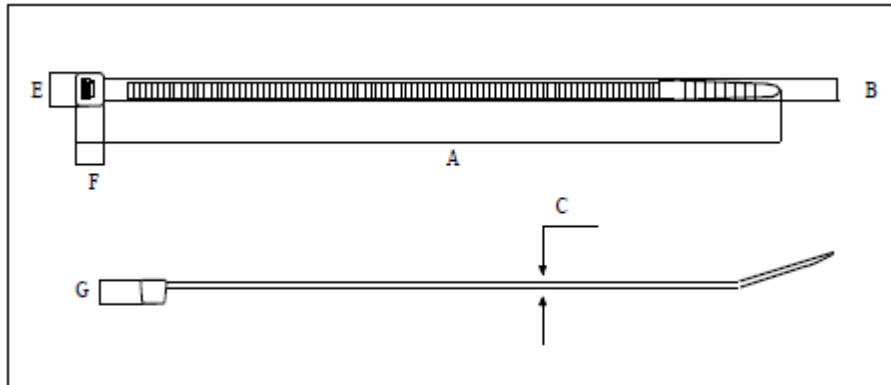

Product code	Dimension [mm]					Tensile strength [N]
	A x B	C	E	F	G	
P1231-2	98 x 2.5	1	4.7	4.7	3.8	80
P1232-2	140 x 3.6	1	6.1	6	4.1	130
P1233-2	200 x 3.6	1.2	6.1	5.8	4	130
P1234-2	200 x 4.8	1.4	7.8	7.3	5.4	220
P1235-2	290 x 4.5	1.4	7.8	7.1	5.3	220
P1236-2	360 x 4.5	1.4	7.8	7.15	5.3	220
P1237-2	365 x 7.5	1.8	12.8	11.3	7.5	540

2. TECHNICAL FEATURES

Resist radiation UV

Material: Polyamide 6.6 natural additivated with iron oxide

Flammability of raw material : UL 94 - HB

Umidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)

Installation temperature: -5° C ÷ +60° C

Working temperature: -40° C ÷ +85° C

Colour: Blue

No halogens

3. PROPERTIES

Type of solution	Resistance
Solvents, oils, greases, oil derivatives	Very good
Alkalis	Good
Acids	Limited
Phenols and chlorinated solvents	No

4. REGULATORY INFORMATION

EC Directives Raw material used to produce listed cable ties are compliant with EC Directives:

2000/53/EC (ELV)

2002/95/EC (RoHS)

2002/96/EC (WEEE)

2003/11/EC

Advice:: Keep the bag closed after use

PROHACCP Company informs that our metal detectable products have magnetic characteristics and can be detected by standard metal detection systems. However due to settings of different metal detection systems, Prohaccp Sp. z o.o. cannot guarantee that our products will be detected by your metal detectors. Therefore we cannot take responsibility for any non-detection of our products or their parts. Detectability of our products depends on metal detector settings, and type of food products produced (product composition, size, humidity etc). In order to make sure that our metal detectable products will be detected we strongly recommend that you test it on your metal detectors before you use it.

On behalf of PROHACCP Sp. z o. o.

Kielce, January 15, 2018

Ewelina Kasprzyk

V-ce President

2/2